


18 Inch Motor Overview

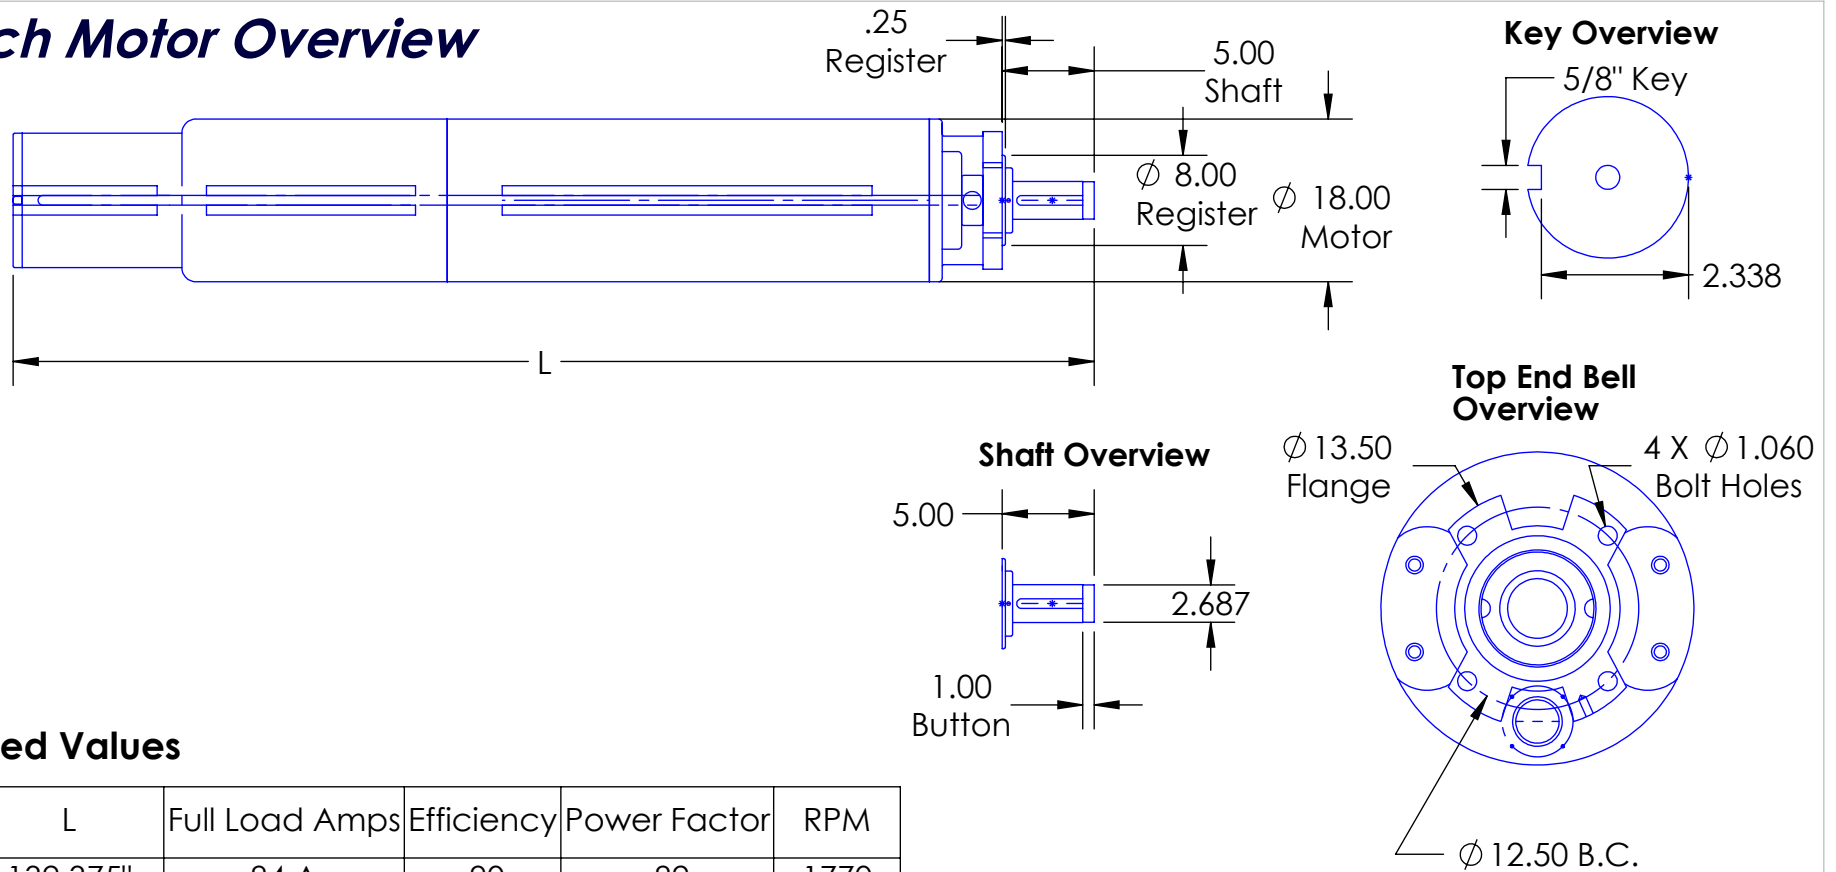

Calculated Values

Model	L	Full Load Amps	Efficiency	Power Factor	RPM
600 HP	132.375"	84 A	.90	.82	1770
700 HP	142.375"	98 A	.90	.82	1770
800 HP	152.375"	112 A	.90	.82	1770
900 HP	162.375"	126 A	.90	.82	1770
1000 HP	172.375"	140 A	.90	.82	1770

Note: All Figures are from Calculations

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RENTZEL ENERGY EQUIPMENT COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RENTZEL ENERGY EQUIPMENT COMPANY IS PROHIBITED.</p>				<p>UNLESS OTHERWISE SPECIFIED:</p> <p>DIMENSIONS ARE IN INCHES TOLERANCES: In Sketch FRACTIONAL $\pm 1/64$ ANGULAR: MACH $\pm .5$DEG TWO PLACE DECIMAL ± 0.010 THREE PLACE DECIMAL ± 0.005</p> <p>INTERPRET GEOMETRIC TOLERANCING PER:</p> <p>MATERIAL Overview</p> <p>FINISH</p>	<p>NAME G.L.</p> <p>DATE 8/20/2011</p>	<p>Rentzel Energy Equipment Company</p>				
						<p>TITLE: 18 Inch Motor</p>				
		NEXT ASSY	USED ON			<p>COMMENTS: 18 Inch REECO Motor Overview</p>		<p>SIZE A</p>	<p>DWG. NO.</p>	<p>REV A</p>
		APPLICATION				DO NOT SCALE DRAWING		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1
		5	4			3	2	1		